

Bericht-Nr.: Report no.:	GC51161268-02.EN04	Auftrags-Nr.: Order no.:	326021268	Seite 1 von 31 Page 1 of 31
Kunden-Referenz-Nr.: Client reference no.:	2112606	Auftragsdatum: Order date:	2024-05-09	
Auftraggeber: Client:	BEST SYSTEMS GMBH			
Auftrageberadresse: Client Address:	Siebenhirtenstrasse 12A - Objekt 5,A-1230 Vienna, Austria			
Forschungsprojekte: Study item:	Life Cycle Assessment			
Inhalt der Forschung: Study content:	Life Cycle Assessment of BIG LEDUP Series Portable Lightboxes			
Anforderung: Specification:	EN 15804+A2:2019, Sustainability of construction works - Environmental product declarations - Core rules for the product category of construction products ISO 14044:2006+A1:2018+A2:2020, Environmental management — Life cycle assessment — Requirements and guidelines			
Dauer der Forschung: Study period:	2024-11-04 – 2025-01-23			
Ort der Forschung: Place of study: TUV Rheinland (Shanghai) Co., Ltd. No.177, Lane 777, West Guangzhong Road Jingan District, Shanghai, China, 200072				
Zur vorbereitung: Prepared by:	Viola He		Genehmigt von: Reviewed by:	Keith Roy
Datum: Date:	2025-03-03		Ausstellungsdatum: Issue date:	2025-03-03
Stellung / Position:	Sachverständige(r)/Expert		Stellung / Position:	Sachverständige(r)/Expert
Sonstiges / Others:	N.A.			
Diese studie, die Von TÜV Rheinland auf der basis eines kundenverzeichnis erstellt wurde, dient dazu, ein klares bild Von den CO₂-emissionen der gewünschten produkte zu gewinnen und eine grundlage für eine künftige verringerung der CO₂-emissionen zu schaffen. This study was prepared by TÜV Rheinland based on the customer's life cycle inventory in order to clearly understand the carbon emissions of the customer's target product and to provide a basis for future carbon reduction of that product.				

Table of Contents

1 Product Specifications	3
2 Goal and Scope.....	3
2.1 Goal	3
2.2 Functional unit	4
2.3 System boundary	4
2.3.1 Information modules	6
2.4 Cut-off rules	7
2.5 Selection of data.....	7
2.6 Data quality	8
2.7 Units	9
2.8 Allocation rules	9
2.9 Life Cycle Inventory	10
2.9.1 Calculation procedures.....	10
2.9.2 Biogenic carbon content.....	12
3 Impact assessment	14
3.1 Electricity usage	24
3.2 Contribution analysis	24
4 Interpretation	28
4.1 Assumptions and Limited Conditions	29
4.2 Additional information.....	30

Bericht-Nr.: GC51161268-02.EN04
Report no.:

Seite 3 von 31
Page 3 of 31

1 Product Specifications

The BLUP series lightboxes are LED aluminum alloy lightbox produced by EXPO D&P LTD, available in four specifications: BLUP-88-200-ABS, BLUP-100-200-ABS, BLUP-200-200-ABS and BLUP-600-200-ABS. This series of lightboxes can be equipped with height/width extension accessories, including BLUP-EXT-50-200, BLUP-EXT-75-200, BLUP-EXT-85-200, BLUP-EXT-100-200, BLUP-VE-30-S, BLUP-VE-48-S, BLUP-VE-98-S, BLUP-VS-30, BLUP-VS-48, BLUP-VS-98 and BLUP-EXT-ABS.

The BLUP-EXT-ABS accessory is a packaging of other accessories.

The dimensions, luminous flux, and reference service life (RSL) of the lightboxes and its accessories are shown in the table below.

Specification of lightbox	Dimension (cm*cm)	Net weight of lightbox (kg)	Packaging weight (kg)	Luminous flux (lumen)	Reference service life (hour)
BLUP-88-200-ABS	88*200	13.386	6.890	8,165.600	50,000
BLUP-100-200-ABS	100*200	13.857	6.890	10,614	50,000
BLUP-200-200-ABS	200*200	21.595	7.865	21,570.600	50,000
BLUP-600-200-ABS	600*200	50.364	16.082	64,802.400	50,000

Specification of accessory	Dimension (cm)	Net weight of accessory (kg)	Luminous flux (lumen)	Reference service life (hour)
BLUP-EXT-50-200	50	4.791	4479.600	50,000
BLUP-EXT-75-200	75	5.767	7767.200	50,000
BLUP-EXT-85-200	85	5.908	8165.600	50,000
BLUP-EXT-100-200	100	6.794	10893.600	50,000
BLUP-VE-30-S	30	1.034	/	/
BLUP-VE-48-S	48	1.572	/	/
BLUP-VE-98-S	98	3.086	/	/
BLUP-VS-30	30	0.220	/	/
BLUP-VS-48	48	0.311	/	/
BLUP-VS-98	98	0.578	/	/
BLUP-EXT-ABS	/	5.770	/	/

EXPO D&P LTD is a subsidiary of BEST SYSTEMS GMBH.

2 Goal and Scope

2.1 Goal

According to ISO 14044:2006, in defining the goal of an LCA, the following items shall be unambiguously stated:

- the intended application;
- the reasons for carrying out the study;
- the intended audience, i.e. to whom the results of the study are intended to be communicated;
- whether the results are intended to be used in comparative assertions intended to be disclosed to the public.

Remark: The goal of this Life Cycle Assessment (LCA) study is to get a clear picture of the carbon emission of the company's lightbox products at the present stage, and provide a provide a basis for industry comparisons. The results reported in the LCA study are used for self-declaration of BEST SYSTEMS GMBH.

Bericht-Nr.: GC51161268-02.EN04
Report no.:

Seite 4 von 31
Page 4 of 31

Industry comparison is only applicable between lightboxes. Lightboxes with accessories are not suitable for industry comparison because the declared/functional unit of lightbox and accessory are different.

2.2 Functional unit

This report based on the EN 15804+A2 shall use a functional unit (FU). All subsequent analyses then refer to that FU, as all inputs and outputs in the life cycle inventory (LCI) and consequently the life cycle impact assessment (LCIA) profile are related to the FU.

- The function of the lightbox is to provide lighting within the Reference Service Life(RSL). The lightbox is characterized for an outgoing artificial luminous flux of [V] lumens with a RSL of [H].
- The FU is defined as a lightbox providing lighting that delivers an outgoing artificial luminous flux of 1,000 lumens during a RSL of 50,000 hours.
- The outgoing artificial luminous flux [V] of the device is measured by the manufacturer. The unit of [V] is lumen.
- The RSL of the lightbox is the lightbox life expectancy as declared by the manufacturers according to the conditions of use provided by them. It is declared in hours of operation[H] by the manufacturer.

The FU is calculated as:

$$([V]/1,000) \times ([H]/50,000)$$

Consequently, the FU of the following product corresponds to:

Specification	FU
BLUP-88-200-ABS	$(8,165.600/1,000) \times (50,000/50,000) = 8.166$
BLUP-100-200-ABS	$(10,614/1,000) \times (50,000/50,000) = 10.614$
BLUP-200-200-ABS	$(21,570.600/1,000) \times (50,000/50,000) = 21.571$
BLUP-600-200-ABS	$(64,802.400/1,000) \times (50,000/50,000) = 64.802$

Remark: In LCA, the declared unit shall be applied if a functional unit cannot be defined. The basic role of the declared unit is to provide a baseline for statistical measurement inputs and outputs in the LCA.

According to EN 15804+A2, this study uses 1 piece of accessory as the declared unit.

2.3 System boundary

Life-cycle stages	Information modules	Included/Excluded
A1-A3 Product stage	A1) Raw material supply	Included
	A2) Transport	Included
	A3) Manufacturing	Included
A4-A5 Construction process stage	A4) Transport	Included
	A5) Construction installation	Included
B Use stage	B1) Use	Excluded
	B2) Maintenance	Excluded
	B3) Repair	Excluded
	B4) Replacement	Excluded
	B5) Refurbishment	Excluded
	B6) Energy use to operate building integrated technical systems	Included
	B7) Operational water use by building integrated technical systems	Excluded
C End of life stage	C1) Deconstruction	Included

Bericht-Nr.: GC51161268-02.EN04
Report no.:

Seite 5 von 31
Page 5 of 31


	C2) Transport	Included
	C3) Waste processing	Included
	C4) Waste disposal	Included
D Benefits and loads beyond the product system boundary	D) Reuse, recovery, recycling, potential	Included

Interpretation of modules not taken into account in the boundary:

- Lightboxes do not relate to modules B1 and B7;
- Due to lack of information, modules B2, B3, B4 and B5 are not involved in this calculation. It is anticipated that the downstream supply chain will provide relevant information in the future to enhance the calculation of the product's life cycle assessment.

Processes in stages can be excluded are:

- business travel of personnel and travel to and from work by personnel;
- indirect activities (like administration, sales, research and development activities etc.).

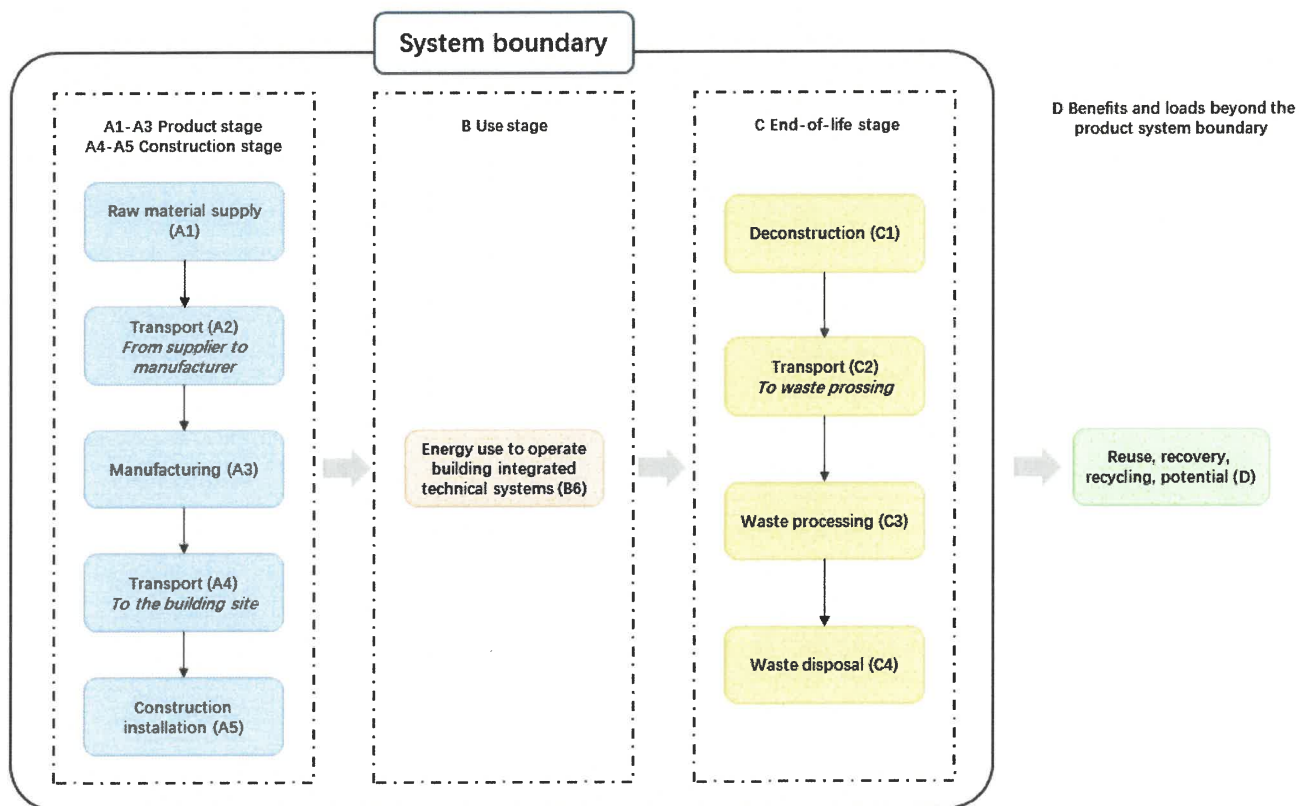

* The system boundary of BLUP-EXT-ABS accessory includes A1-A5.

The system boundary of BLUP-EXT-50-200, BLUP-EXT-75-200, BLUP-EXT-85-200 and BLUP-EXT-100-200 accessories includes A1-A5, B6, C1-C4 and D.

The system boundary of BLUP-VE-30-S, BLUP-VE-48-S, BLUP-VE-98-S, BLUP-VS-30, BLUP-VS-48 and BLUP-VS-98 accessories includes A1-A5, C1-C4 and D.

Bericht-Nr.: GC51161268-02.EN04
Report no.:

Seite 6 von 31
Page 6 of 31

2.3.1 Information modules

- Raw material supply (A1):
Extraction and processing of raw materials and biomass production and processing;
Production and processing of semi-finished components.
- Transport (A2):
Transportation up to the factory gate.
- Manufacturing (A3):
Manufacturing of products;
Processing up to the end-of-waste state or disposal of final residues including any packaging not leaving the factory gate with the product.
- Transportation (A4):
Transportation from the production gate to the construction site.
- Installation (A5):
Waste processing of the waste from product packaging and product wastage during the construction processes up to the end-of-waste state or disposal of final residues;
Installation of the product into the building including manufacture and transportation of ancillary materials and any energy or water required for installation or operation of the construction site. It also includes on-site operations to the product.
- Energy use to operate building integrated technical systems (B6):
Energy use during the operation of the product (the integrated building technical system), together with its associated environmental aspects and impacts including processing and transportation of any waste arising on site from the use of energy.
- Deconstruction (C1):
Deconstruction, including dismantling or demolition, of the product from the building, including initial on-site sorting of the materials;
- Transport (C2):
Transportation of the discarded product as part of the waste processing, e.g. to a recycling site and transportation of waste e.g. to final disposal.
- Waste processing (C3):
Waste processing e.g. collection of waste fractions from the deconstruction and waste processing of material flows intended for reuse, recycling and energy recovery.
- Waste disposal (C4):
Waste disposal including physical pre-treatment and management of the disposal site.
- Benefits and loads beyond the product system boundary (D):

Bericht-Nr.: GC51161268-02.EN04
Report no.:

Seite 7 von 31
Page 7 of 31

The environmental benefits or loads resulting from reusable products, recyclable materials and/or useful energy carriers leaving a product system.

2.4 Cut-off rules

General cut off rules: a process or activity that contributes 1% or less of the total mass and 1% or less of the total energy use may be omitted from the inventory analysis for any particular module. The sum of the excluded material flows must not exceed 5% of mass, energy or environmental relevance.

The cardboard packaging of the upstream raw materials accounts for less than 1% of the total product weight, therefore, this activity is cut off in accordance with the cut off rules.

2.5 Selection of data

The report boundary of the lightbox is set from cradle to grave. The product life cycle stage is from resource extraction to final disposal. Information on data selection of this study is shown in the table below.

	Module A1-A3		A4 and A5	B6	C1-C4
Modules	Production of commodities, raw materials	Product manufacture	Installation processes	Use process	End-of-life processes
Process type	Upstream processes	Processes the manufacturer has influence over	Downstream processes		
Data type	Generic data	Manufacturer's specific data	Manufacturer's specific data	Manufacturer's specific data	Generic data

- Background data is an embedded database based on Ecoinvent database version 3.9.1.

Module A1-A3:

- The data used for raw material supply stage, raw material transportation stage and manufacturing stage comes from data collection tables (Annex 1), provided by EXPO D&P LTD.
- The geographical scope of A1-A3 is Suzhou, Jiangsu, China.
- The time boundary of module A1-A3 specific data is from 2023.10.01 to 2024.10.01.
- The specific data on material losses (cutting, wastage, residues, etc.) is provided by the manufacturer. See Annex 1 for details.

Module A4 and A5:

- The data on transport distances and carrier types for the distribution stage comes from data collection tables (Annex 1), provided by EXPO D&P LTD.

Module B6:

- In B6 module, the data on the energy consumption of different specification of lightboxes are provided by the manufacturer.

Module C1-C4:

- The manufacturer claims that lightboxes are distributed to the EU. Lightboxes are subject to waste management according to the requirements of the EU or German health authorities. It can be considered that, in the end of life (EoL) stage, the products are collected and recycled according to the EU Directive 2012/19/EU on Waste Electrical and Electronic Equipment (WEEE).
- In module C1, the manufacturer claims that the lightbox is manually dismantled, without energy consumption.

Bericht-Nr.: GC51161268-02.EN04
Report no.:

Seite 8 von 31
Page 8 of 31

- The manufacturer does not provide data on modules C2, C3 and C4 of the product to support the evaluation of the EoL, it was estimated based on the input materials and generic data.
- The generic data on modules C2, C3 and C4 is selected based on the EU Directive 2012/19/EU on WEEE. It comes from the most up-to-date Eurostats database.

2.6 Data quality

According to EN 15804+A2, the data quality assessment information shall cover at least the following elements:

- a) time-related coverage (TiR): age of data and the minimum length of time over which data should be collected
- b) geographical coverage (GeR): geographical area from which data for unit processes
- c) technology coverage (TeR): specific technology or technology mix

Data quality requirements are listed in the table below.

Criteria	Options	Quality level	Score
Time-related coverage	Less than 3 years difference between the reference year according to the documentation, and the time period for which data are representative.	Very good	1
	Less than 6 years of difference between the reference year according to the documentation, and the time period for which data are representative	Good	2
	Less than 10 years of difference between the reference year according to the documentation, and the time period for which data are representative	Fair	3
	Less than 15 years of difference between the reference year according to the documentation, and the time period for which data are representative	Poor	4
	Age of data unknown or more than 15 years of difference between the reference year according to the documentation, and the time period for which data are representative	Very poor	5
Geographical coverage	Data from area under study.	Very good	1
	Average data from larger area in which the area under study is included	Good	2
	Data from area with similar production conditions	Fair	3
	Data from area with slightly similar production conditions	Poor	4
	Data from unknown or distinctly different area (North America instead of Middle East, OECD Europe instead of Russia)	Very poor	5
Technology coverage	Data from processes and products under study. Same state of technology applied as defined in goal and scope (i.e. identical technology)	Very good	1
	Data from processes and products under study (with similar technology). Evidence of deviations in state of technology, e.g. different by-product.	Good	2
	Data from processes and products under study but from different technology. This score is also applied when not technology is specified; e.g. wheat (no further specification)	Fair	3
	Data on related processes or products; organic wheat under study, data for organic rye provided.	Poor	4
	Data on related processes on but with a different scale or from different technology; organic wheat under study, data for conventional wheat provided.	Very poor	5

Calculate the DQR score of the declared value as:

$$\frac{\text{TeR} + \text{TiR} + \text{GeR}}{3}$$

The final score of data should not be higher than 3 in this study.

The final scores are shown in the table below.

Bericht-Nr.: GC51161268-02.EN04
Report no.:

Seite 9 von 31
Page 9 of 31

Data quality scores of different specification

Specification	Score
BLUP-88-200-ABS	1.965
BLUP-100-200-ABS	1.963
BLUP-200-200-ABS	1.949
BLUP-600-200-ABS	1.949
BLUP-EXT-50-200	1.912
BLUP-EXT-75-200	1.912
BLUP-EXT-85-200	1.912
BLUP-EXT-100-200	1.912
BLUP-VE-30-S	1.977
BLUP-VE-48-S	1.977
BLUP-VE-98-S	1.977
BLUP-VS-30	1.903
BLUP-VS-48	1.903
BLUP-VS-98	1.903
BLUP-EXT-ABS	1.933

The assessments of data quality are shown in Annex 2.

2.7 Units

According to EN15804+A2, SI units shall be used. Basic units are: metre (m), kilogram (kg), molecular weight in grams (mol). With the exceptions noted below, all resources are expressed in kg.

Exceptions are:

- Resources used for energy input (primary energy), which are expressed as kWh or MJ, including renewable energy sources e.g. hydropower, wind power;
- Water use, which is expressed in m³ (cubic metres)
- Temperature, which is expressed in degrees Celsius;
- Time, which is expressed in practical units depending on the assessment scale: minutes, hours, days, years.

All figures displayed in this study should be rounded to 3 decimal places.

2.8 Allocation rules

If mass criteria are applied, the allocation factor shall be calculated as the total mass of the lightbox or component divided by the total mass of all lightboxes or components produced at the given production site.

The use of economic allocation criteria should be avoided, because of its sensibility to market specific conditions.

According to EN 15804+A2, for using economic allocation according to the different contributions to the overall revenue are described. If economic allocation has been used, a specific sensitivity analysis shall be provided to the verifier and the monitoring of the relationship between results and current economic value shall be documented and updated.

In this study, the results of the product stage are calculated based on the data provided by the manufacturer, without allocation.

Bericht-Nr.: GC51161268-02.EN04
Report no.:

Seite 10 von 31
Page 10 of 31

Allocation procedure for reuse and recycling is open-loop method. An open-loop allocation procedure applies to open-loop product systems where the material is recycled into other product systems and the material undergoes a change to its inherent properties.

The collection rate is 40.1%. Data comes from the most up-to-date collection rate of WEEE in the European Union in 2022 (measured as the weight of WEEE collected relative to the average weight of electronic equipment put on the market in the 3 preceding years).

The recycling rate is 87.8%. Data comes from the most up-to-date Eurostats recycling rate (Germany, in 2022) from the large equipment (any external dimension over 50 cm) waste category.

2.9 Life Cycle Inventory

2.9.1 Calculation procedures

The modeling and calculation is based on manufacturer's specific data, generic data and background data.

The data provided by the manufacturer was preprocessed as follows before modeling:

In module A2, the formula is:

$$\text{Raw material weight (kg)} \times \text{Raw material transport distance (km)} = \text{Input (kg} \cdot \text{km)}$$

See Annex 1 for detail values.

In module A4, the formula is:

$$\text{Product with package weight (kg)} \times \text{Distribution distance (km)} = \text{Input (kg} \cdot \text{km)}$$

See Annex 1 for detail values.

In module B6, the RSL of the four specifications of lightboxes is 50,000 hours. The energy usage values for each lightbox and accessory are shown in the table below.

$$\text{Operational energy use value (kWh)} = \text{Product Power Consumption (kW)} \times \text{RSL (hours)}$$

Specification	Product Power Consumption (kW)	Operational energy use value (kWh)
BLUP-88-200-ABS	0.078	3,900
BLUP-100-200-ABS	0.094	4,700
BLUP-200-200-ABS	0.186	9,300
BLUP-600-200-ABS	0.538	26,900
BLUP-EXT-50-200	0.041	2,050
BLUP-EXT-75-200	0.066	3,300
BLUP-EXT-85-200	0.074	3,700
BLUP-EXT-100-200	0.089	4,450

In module C1, the common scenario of manual dismantling for 100% of the product is considered. Dismantled product weight of each product is shown in below table.

In module C2, the distance to transport the deconstructed product from the construction site to the waste management site is estimated to be 100km. The formula is:

$$\text{Dismantled product (kg)} \times \text{Distance of transport to waste manager (km)} = \text{Input (kg} \cdot \text{km)}$$

Specification	Dismantled product (kg)	Distance (km)	Input (kg·km)
BLUP-88-200-ABS	13.386	100	1,338.600
BLUP-100-200-ABS	13.856	100	1,385.600
BLUP-200-200-ABS	21.549	100	2,154.900
BLUP-600-200-ABS	50.364	100	5,036.400

Bericht-Nr.: GC51161268-02.EN04
Report no.:

Seite 11 von 31
Page 11 of 31

Specification	Dismantled product (kg)	Distance (km)	Input (kg·km)
BLUP-EXT-50-200	4.791	100	479.100
BLUP-EXT-75-200	5.767	100	576.700
BLUP-EXT-85-200	5.908	100	590.800
BLUP-EXT-100-200	6.794	100	679.400
BLUP-VE-30-S	1.034	100	103.400
BLUP-VE-48-S	1.572	100	157.200
BLUP-VE-98-S	3.086	100	308.600
BLUP-VS-30	0.220	100	22
BLUP-VS-48	0.311	100	31.100
BLUP-VS-98	0.578	100	57.800

In module C3, the waste collection rate is 40.1%, and the waste recycling rate is 87.8%. Metal, PC, and LED are recycled. Therefore, the formula is:

$$\text{Metal/PC/LED weight (kg)} \times 40.1\% \times 87.8\% = \text{Recycling material weight (kg)}$$

Recycling material weight of each lightbox is shown in below table.

Recycling material	Recycling material weight (kg)			
	BLUP-88-200-ABS	BLUP-100-200-ABS	BLUP-200-200-ABS	BLUP-600-200-ABS
Aluminium	2.318	2.318	2.421	2.421
Steel	0.134	0.134	0.134	0.134
Copper	<0.001	<0.001	<0.001	<0.001
PC	0.006	<0.001	0.006	<0.001
LED	0.270	0.270	0.270	0.270
Total	2.729	2.723	2.831	2.826

Recycling material weight of each accessory is shown in below table.

Recycling material	Recycling material weight (kg)									
	BLUP-EXT-50-200	BLUP-EXT-75-200	BLUP-EXT-85-200	BLUP-EXT-100-200	BLUP-VE-30-S	BLUP-VE-48-S	BLUP-VE-98-S	BLUP-VS-30	BLUP-VS-48	BLUP-VS-98
Aluminium	1.364	1.661	1.696	1.974	0.350	0.538	1.067	0.074	105.7431	498.1245
Steel	0.211	0.216	0.216	0.222	0.004	0.004	0.004	0.002	0.002	0.002
Copper	/	/	/	/	0.002	0.002	0.002	/	/	/
PC	0.006	0.006	0.006	0.006	0.002	0.002	0.002	<0.001	<0.001	<0.001
LED	0.087	0.129	0.144	0.172	/	/	/	/	/	/
Total	1.668	2.012	2.062	2.374	0.357	0.545	1.074	0.076	0.108	0.500

In module C4, the rest of the product that has not entered the treatment system is sent to the landfill. The formula is:

$$\text{Dismantled product weight (kg)} - \text{Recycling material weight (kg)} = \text{Landfill weight (kg)}$$

In module D, this product claims the environmental benefits due to recycling and reuse according to Directive 2012/19/ EU of WEEE. 35.208%(40.1%*87.8%) of the metals, PC, and LEDs are recycled.

There is no energy recovery and reuse.

Bericht-Nr.: GC51161268-02.EN04
Report no.:

Seite 12 von 31
Page 12 of 31

2.9.2 Biogenic carbon content

Growing biomass removes CO₂ from the air; the carbon from the removed CO₂ is transformed into the plant tissue and is called biogenic carbon. The biogenic carbon comprises part of the product and eventually can be released into the air again as CO₂ or as CH₄.

The biogenic carbon correction approach covers modelling and evaluation of biogenic carbon dioxide for products where biogenic carbon forms part of a product from a cradle-to-gate perspective. It does not cover systems where atmospheric carbon is removed by a product during its use.

In this study, the information on biogenic carbon content of per lightbox are shown in below tables.

1. BLUP-88-200-ABS :

Product components	Weight, kg	Post-consumer material, weight-%	Biogenic material, weight-% and kg C/kg
Coating	0.022	0%	/
LED	0.438	0%	/
PA6	0.016	0%	/
PC	0.042	0%	/
POM	0.001	0%	/
Stainless steel	0.052	0%	/
Connector	0.099	0%	/
Cable	0.185	0%	/
Power	0.211	0%	/
Sealing tape	0.001	0%	/
Gule	0.015	0%	/
Cold rolled steel	0.001	0%	/
Aluminium alloy	11.064	0%	/
Carbon steel	0.094	0%	/
Copper	0.013	0%	/
Rubber	0.012	0%	/
Zinc alloy	1.120	0%	/
TOTAL	13.386	0%	/
Packaging materials	Weight, kg	Weight-% (versus the packing)	Weight biogenic carbon, kg C/kg
Cardboard	1.694	24.586%	0.399 kg C/kg
ABS	3.948	57.300%	/
EVA	1.233	17.896%	/
PC	0.015	0.218%	/
TOTAL	6.890	100%	/

2. BLUP-100-200-ABS:

Product components	Weight, kg	Post-consumer material, weight-%	Biogenic material, weight-% and kg C/kg
Coating	0.022	0%	/
LED	0.476	0%	/
PA6	0.016	0%	/
PC	0.042	0%	/
Stainless steel	0.052	0%	/
Connector	0.099	0%	/

Bericht-Nr.: GC51161268-02.EN04
Report no.:

Seite 13 von 31
Page 13 of 31

Product components	Weight, kg	Post-consumer material, weight-%	Biogenic material, weight-% and kg C/kg
Cable	0.185	0%	/
Power	0.211	0%	/
Sealing tape	0.001	0%	/
Gule	0.015	0%	/
Cold rolled steel	0.001	0%	/
Aluminium alloy	11.497	0%	/
Carbon steel	0.094	0%	/
Copper	0.013	0%	/
Rubber	0.012	0%	/
Zinc alloy	1.120	0%	/
TOTAL	13.856	0%	/
Packaging materials	Weight, kg	Weight-% (versus the packing)	Weight biogenic carbon, kg C/kg
Cardboard	1.694	24.586%	0.399 kg C/kg
ABS	3.948	57.300%	/
EVA	1.233	17.896%	/
PC	0.015	0.218%	/
TOTAL	6.890	100%	/

3. BLUP-200-200-ABS:

Product components	Weight, kg	Post-consumer material, weight-%	Biogenic material, weight-% and kg C/kg
Coating	0.024	0%	/
LED	0.964	0%	/
PA6	0.042	0%	/
PC	0.069	0%	/
POM	0.002	0%	/
Stainless steel	0.033	0%	/
Connector	0.103	0%	/
Cable	0.188	0%	/
Power	0.803	0%	/
Gule	0.015	0%	/
Cold rolled steel	0.001	0%	/
Aluminium alloy	17.362	0%	/
Carbon steel	0.715	0%	/
Copper	0.013	0%	/
Rubber	0.016	0%	/
Zinc alloy	1.199	0%	/
TOTAL	21.549	0%	/
Packaging materials	Weight, kg	Weight-% (versus the packing)	Weight biogenic carbon, kg C/kg
Cardboard	1.850	23.522%	0.399 kg C/kg
ABS	4.550	57.851%	/
EVA	1.450	18.436%	/
PC	0.015	0.191%	/
TOTAL	7.865	100%	/

Bericht-Nr.: GC51161268-02.EN04
Report no.:

Seite 14 von 31
Page 14 of 31

4. BLUP-600-200-ABS:

Product components	Weight, kg	Post-consumer material, weight-%	Biogenic material, weight-% and kg C/kg
Coating	0.022	0%	/
LED	2.903	0%	/
PA6	0.154	0%	/
PC	0.117	0%	/
POM	0.004	0%	/
Stainless steel	0.046	0%	/
Connector	0.734	0%	/
Cable	0.188	0%	/
Power	1.605	0%	/
Gule	0.031	0%	/
Cold rolled steel	0.002	0%	/
Aluminium alloy	40.094	0%	/
Carbon steel	2.854	0%	/
Copper	0.028	0%	/
Rubber	0.066	0%	/
Zinc alloy	1.516	0%	/
TOTAL	50.364	0%	/
Packaging materials	Weight, kg	Weight-% (versus the packing)	Weight biogenic carbon, kg C/kg
Cardboard	3.750	23.318%	0.399 kg C/kg
ABS	9.100	56.585%	/
EVA	3.202	19.910%	/
PC	0.030	0.187%	/
TOTAL	16.082	100%	/

Since the weight proportion of biological materials in packaging is relatively high. A biogenic carbon balance correction is applied to them.

Remark: The information on biogenic carbon content of per accessory is shown in Annex 3.

3 Impact assessment

The information on environmental impacts is expressed with the impact category indicators of Life Cycle Impact Assessment (LCIA) using characterisation factors in a LCIA according to ISO 14044.

In this study, core environmental impact indicators are reported.

Information on the impact categories, indicators, and units of core environmental impact indicators is listed below.

Core environmental impact indicators

Impact category	Indicator	Unit (expressed per functional unit or per declared unit)
Climate change – total ^a	Global Warming Potential total (GWP-total)	kg CO ₂ eq.
Climate change - fossil	Global Warming Potential fossil fuels (GWP-fossil)	kg CO ₂ eq.

Bericht-Nr.: GC51161268-02.EN04
Report no.:

Seite 15 von 31
Page 15 of 31

Climate change - biogenic	Global Warming Potential biogenic (GWP-biogenic)	kg CO ₂ eq.
Climate change - land use and land use change ^b	Global Warming Potential land use and land use change (GWP-luluc)	kg CO ₂ eq.
Ozone Depletion	Depletion potential of the stratospheric ozone layer (ODP)	kg CFC 11 eq.
Acidification	Acidification potential, Accumulated Exceedance (AP)	mol H ⁺ eq.
Eutrophication aquatic freshwater	Eutrophication potential, fraction of nutrients reaching freshwater end compartment (EP-freshwater)	kg P eq.
Eutrophication aquatic marine	Eutrophication potential, fraction of nutrients reaching marine end compartment (EP-marine)	kg N eq.
Eutrophication terrestrial	Eutrophication potential, Accumulated Exceedance (EP-terrestrial)	mol N eq.
Photochemical ozone formation	Formation potential of tropospheric ozone (POCP);	kg NMVOC eq.
Depletion of abiotic resources - minerals and metals ^{c d}	Abiotic depletion potential for non-fossil resources (ADP-minerals&metals)	kg Sb eq.
Depletion of abiotic resources - fossil fuels ^c	Abiotic depletion for fossil resources potential (ADP-fossil)	MJ, net calorific value
Water use	Water (user) deprivation potential, deprivation-weighted water consumption (WDP)	m ³ world eq. deprived

^a The total global warming potential (GWP-total) is the sum of

- GWP-fossil
- GWP-biogenic
- GWP-luluc

^b It is permitted to omit GWP-luluc as separate information if its contribution is < 5 % of GWP-total over the declared modules excluding module D.

^c The abiotic depletion potential is calculated and declared in two different indicators:

- ADP-minerals&metals include all non-renewable, abiotic material resources (i.e. excepting fossil resources);
- ADP-fossil include all fossil resources and includes uranium.

^d ultimate reserve model of the ADP-minerals&metals model

The indicators are calculated based on EN 15804 +A2 (adapted) V1.00 / EF 3.1 normalization and weighting set.

Core environmental impact indicators per functional unit of lightbox in different specifications are shown in the table below, including the calculation of biogenic carbon balance correction.

Remark: LCIA results per declared unit of accessory in different specifications are shown in Annex 4.

Bericht-Nr.: GC51161268-02.EN04

Report no.:

1. BLUP-88-200-Abs:

The calculation of GWP-biogenic results (unit is kg CO₂ eq.):

	A1	A2	A3	A4	A5	C1	C2	C3
GWP-biogenic (non-biobased material/fuel in product/packaging)	3.895E-01	8.123E-05	3.046E-02	1.151E-03	1.049E+00	/	2.792E-05	-6.420E-04
GWP-biogenic (biobased material/fuel in product/packaging)	-3.281E-01	/	-8.145E-04	-1.045E-04	/	/	/	3.290E-01
GWP-biogenic (as reported in the LCA)	6.139E-02	8.123E-05	2.965E-02	1.047E-03	1.049E+00	/	2.792E-05	3.284E-01

Indicator	A1	A2	A3	A4	A5	B6	C1	C2	C3	C4
GWP-total [kg CO ₂ eq.]	3.580E+01	8.196E-02	1.736E-01	1.043E+00	1.101E+00	1.780E+02	/	3.092E-02	4.385E-01	1.419E+00
GWP-fossil [kg CO ₂ eq.]	3.567E+01	8.183E-02	1.439E-01	1.041E+00	5.202E-02	1.717E+02	/	3.088E-02	1.098E-01	6.700E-02
GWP-biogenic [kg CO ₂ eq.]	6.139E-02	8.123E-05	2.965E-02	1.047E-03	1.049E+00	5.834E+00	/	2.792E-05	3.284E-01	1.352E+00
GWP-luluc [kg CO ₂ eq.]	6.938E-02	4.639E-05	5.619E-05	7.354E-04	4.577E-07	4.289E-01	/	1.499E-05	3.003E-04	5.895E-07
OOP [kg CFC-11 eq.]	3.956E-07	1.555E-09	2.530E-10	1.887E-08	6.477E-11	3.267E-06	/	6.715E-10	1.548E-09	8.343E-11
AP [mole of H ⁺ eq.]	2.259E-01	3.284E-04	7.548E-04	1.719E-02	6.847E-05	9.833E-01	/	1.007E-04	6.695E-04	8.820E-05
EP-freshwater [kg P eq.]	2.783E-03	8.983E-07	3.347E-06	9.030E-06	1.157E-05	1.698E-02	/	2.470E-07	2.781E-06	1.490E-05
EP-marine [kg N eq.]	3.887E-02	1.076E-04	1.677E-04	4.504E-03	4.323E-04	1.235E-01	/	3.421E-05	2.035E-04	5.568E-04
EP-terrestrial [mole of N eq.]	4.261E-01	1.167E-03	1.711E-03	4.965E-02	1.928E-04	1.439E+00	/	3.657E-04	2.226E-03	2.483E-04
POCP [kg NMVOC eq.]	1.321E-01	4.587E-04	4.625E-04	1.423E-02	4.055E-04	4.623E-01	/	1.504E-04	7.061E-04	5.223E-04
ADF-mineral & metals [kg Sb eq.]	2.370E-03	4.559E-07	9.083E-08	2.179E-06	1.422E-09	2.050E-03	/	9.912E-08	2.353E-07	1.832E-09
ADF-fossils [MJ]	4.501E+02	1.141E+00	1.385E+00	1.383E+01	5.319E-02	3.886E+03	/	4.377E-01	1.537E+00	6.852E-02
Water use [m ³ world equiv.]	8.289E+00	5.159E-03	1.570E-02	5.118E-02	1.147E-04	4.384E+01	/	1.784E-03	2.141E-02	1.477E-04

The results per FU of module D are shown below.

Indicator	D
GWP-total [kg CO ₂ eq.]	-3.451E+00
GWP-fossil [kg CO ₂ eq.]	-3.442E+00
GWP-biogenic [kg CO ₂ eq.]	-8.517E-03
GWP-luluc [kg CO ₂ eq.]	1.800E-04
OOP [kg CFC-11 eq.]	-2.848E-08
AP [mole of H ⁺ eq.]	-2.188E-02
EP-freshwater [kg P eq.]	-6.387E-05
EP-marine [kg N eq.]	-2.281E-03
EP-terrestrial [mole of N eq.]	-2.951E-02
POCP [kg NMVOC eq.]	-8.676E-03
ADF-mineral & metals [kg Sb eq.]	-3.285E-06
ADF-fossils [MJ]	-3.700E+01
Water use [m ³ world equiv.]	-1.023E+01

Bericht-Nr.: GC51161268-02.EN04

Report no.:

2. BLUP-100-200-Abs:

The calculation of GWP-biogenic results (unit is kg CO₂ eq.):

	A1	A2	A3	A4	A5	C1	C2	C3
GWP-biogenic (non-biobased material/fuel in product/packaging)	3.141E-01	6.518E-05	2.344E-02	1.389E-03	8.073E-01	/	5.209E-05	-5.112E-04
GWP-biogenic (biobased material/fuel in product/packaging)	-2.524E-01	/	-6.266E-04	-1.287E-04	/	/	/	2.532E-01
GWP-biogenic (as reported in the LCA)	6.163E-02	6.518E-05	2.281E-02	1.260E-03	8.073E-01	/	5.209E-05	2.527E-01

Indicator	A1	A2	A3	A4	A5	B6	C1	C2	C3	C4
GWP-total [kg CO ₂ eq.]	2.894E+01	6.548E-02	1.336E-01	1.252E+00	8.473E-01	1.650E+02	/	5.768E-02	3.404E-01	1.128E+00
GWP-fossil [kg CO ₂ eq.]	2.882E+01	6.538E-02	1.107E-01	1.250E+00	4.002E-02	1.592E+02	/	5.760E-02	8.743E-02	5.330E-02
GWP-biogenic [kg CO ₂ eq.]	6.163E-02	6.518E-05	2.281E-02	1.260E-03	8.073E-01	5.409E+00	/	5.209E-05	2.527E-01	1.075E+00
GWP-luluc [kg CO ₂ eq.]	5.613E-02	3.720E-05	4.323E-05	8.902E-04	3.521E-07	3.977E-01	/	2.797E-05	2.391E-04	4.690E-07
OOP [kg CFC-11 eq.]	3.177E-07	1.239E-09	1.946E-10	2.253E-08	4.983E-11	3.029E-06	/	1.253E-09	1.232E-09	6.637E-11
AP [mole of H ⁺ eq.]	1.823E-01	2.635E-04	5.807E-04	2.106E-02	5.268E-05	9.117E-01	/	1.878E-04	5.330E-04	7.016E-05
EP-freshwater [kg P eq.]	2.256E-03	7.216E-07	2.575E-06	1.086E-05	8.898E-06	1.575E-02	/	4.608E-07	2.214E-06	1.185E-05
EP-marine [kg N eq.]	3.140E-02	8.632E-05	1.290E-04	5.512E-03	3.326E-04	1.145E-01	/	6.383E-05	1.620E-04	4.430E-04
EP-terrestrial [mole of N eq.]	3.439E-01	9.363E-04	1.317E-03	6.077E-02	1.483E-04	1.334E+00	/	6.822E-04	1.772E-03	1.975E-04
POCP [kg NMVOC eq.]	1.065E-01	3.677E-04	3.558E-04	1.737E-02	3.120E-04	4.286E-01	/	2.806E-04	5.622E-04	4.155E-04
ADF-mineral & metals [kg Sb eq.]	1.843E-03	3.672E-07	6.988E-08	2.580E-06	1.094E-09	1.901E-03	/	1.849E-07	1.874E-07	1.457E-09
ADF-fossils [MJ]	3.630E+02	9.112E-01	1.065E+00	1.657E+01	4.093E-02	3.603E+03	/	8.166E-01	1.224E+00	5.450E-02
Water use [m ³ world equiv.]	6.677E+00	4.134E-03	1.208E-02	6.116E-02	8.825E-05	4.065E+01	/	3.328E-03	1.704E-02	1.175E-04

Bericht-Nr.: GC51161268-02.EN04
Report no.:

The results per FU of module D are shown below.

Indicator	D
GWP-total [kg CO ₂ eq.]	-2.756E+00
GWP-fossil [kg CO ₂ eq.]	-2.749E+00
GWP-biogenic [kg CO ₂ eq.]	-6.900E-03
GWP-luluc [kg CO ₂ eq.]	1.438E-04
OOP [kg CFC-11 eq.]	-2.274E-08
AP [mole of H ⁺ eq.]	-1.745E-02
EP-freshwater [kg P eq.]	-4.922E-05
EP-marine [kg N eq.]	-1.807E-03
EP-terrestrial [mole of N eq.]	-2.356E-02
POCP [kg NMVOC eq.]	-6.920E-03
ADF-mineral & metals [kg Sb eq.]	-2.552E-06
ADF-fossils [MJ]	-2.956E+01
Water use [m ³ world equiv.]	-8.176E+00

Bericht-Nr.: GC51161268-02.EN04

Report no.:

3. BLUP-200-200-ABS:

The calculation of GWP-biogenic results (unit is kg CO₂ eq.):

	A1	A2	A3	A4	A5	C1	C2	C3
GWP-biogenic (non-biobased material/fuel in product/packaging)	2.540E-01	5.878E-05	1.153E-02	6.874E-04	4.535E-01	/	2.525E-05	-3.912E-04
GWP-biogenic (biobased material/fuel in product/packaging)	-1.416E-01	/	-3.083E-04	-6.238E-05	/	/	/	1.420E-01
GWP-biogenic (as reported in the LCA)	1.125E-01	5.878E-05	1.122E-02	6.251E-04	4.535E-01	/	2.525E-05	1.416E-01

Indicator	A1	A2	A3	A4	A5	B6	C1	C2	C3	C4
GWP-total [kg CO ₂ eq.]	2.401E+01	5.644E-02	6.572E-02	6.227E-01	4.760E-01	1.607E+02	/	2.796E-02	2.087E-01	8.705E-01
GWP-fossil [kg CO ₂ eq.]	2.385E+01	5.635E-02	5.447E-02	6.217E-01	2.248E-02	1.550E+02	/	2.792E-02	6.692E-02	4.111E-02
GWP-biogenic [kg CO ₂ eq.]	1.125E-01	5.878E-05	1.122E-02	6.251E-04	4.535E-01	5.267E+00	/	2.525E-05	1.416E-01	8.294E-01
GWP-luluc [kg CO ₂ eq.]	4.614E-02	3.334E-05	2.127E-05	4.391E-04	1.978E-07	3.872E-01	/	1.356E-05	1.830E-04	3.617E-07
OOP [kg CFC-11 eq.]	2.615E-07	1.036E-09	9.577E-11	1.126E-08	2.799E-11	2.950E-06	/	6.072E-10	9.432E-10	5.119E-11
AP [mole of H ⁺ eq.]	1.525E-01	2.377E-04	2.857E-04	1.026E-02	2.959E-05	8.877E-01	/	9.103E-05	4.079E-04	5.412E-05
EP-freshwater [kg P eq.]	1.895E-03	6.585E-07	1.267E-06	5.392E-06	4.998E-06	1.533E-02	/	2.233E-07	1.695E-06	9.141E-06
EP-marine [kg N eq.]	2.588E-02	7.748E-05	6.348E-05	2.689E-03	1.868E-04	1.115E-01	/	3.094E-05	1.240E-04	3.417E-04
EP-terrestrial [mole of N eq.]	2.828E-01	8.423E-04	6.478E-04	2.964E-02	8.331E-05	1.299E+00	/	3.306E-04	1.357E-03	1.524E-04
POCP [kg NMVOC eq.]	8.663E-02	3.279E-04	1.751E-04	8.496E-03	1.752E-04	4.173E-01	/	1.360E-04	4.302E-04	3.205E-04
ADF-mineral & metals [kg Sb eq.]	1.130E-03	3.445E-07	3.439E-08	1.301E-06	6.145E-10	1.851E-03	/	8.963E-08	1.434E-07	1.124E-09
ADF-fossils [MJ]	2.968E+02	7.839E-01	5.242E-01	8.256E+00	2.299E-02	3.508E+03	/	3.958E-01	9.367E-01	4.204E-02
Water use [m ³ world equiv.]	4.664E+00	3.677E-03	5.944E-02	3.055E-02	4.957E-05	3.958E+01	/	1.613E-03	1.304E-02	9.066E-05

The results per FU of module D are shown below.

Indicator	D
GWP-total [kg CO ₂ eq.]	-2.044E+00
GWP-fossil [kg CO ₂ eq.]	-2.039E+00
GWP-biogenic [kg CO ₂ eq.]	-4.959E-03
GWP-luluc [kg CO ₂ eq.]	1.099E-04
OOP [kg CFC-11 eq.]	-1.659E-08
AP [mole of H ⁺ eq.]	-1.280E-02
EP-freshwater [kg P eq.]	-3.087E-05
EP-marine [kg N eq.]	-1.260E-03
EP-terrestrial [mole of N eq.]	-1.744E-02
POCP [kg NMVOC eq.]	-5.120E-03
ADF-mineral & metals [kg Sb eq.]	-1.738E-06
ADF-fossils [MJ]	-2.193E+01
Water use [m ³ world equiv.]	-6.075E+00

Bericht-Nr.: GC51161268-02.EN04

Report no.:

4. BLUP-600-200-ABS:

The calculation of GWP-biogenic results (unit is kg CO₂ eq.):

	A1	A2	A3	A4	A5	C1	C2	C3
GWP-biogenic (non-biobased material/fuel in product/packaging)	2.186E-01	5.147E-05	3.839E-03	4.754E-04	3.087E-01	/	5.895E-06	-3.043E-04
GWP-biogenic (biobased material/fuel in product/packaging)	-9.542E-02	/	-1.026E-04	-4.314E-05	/	/	/	9.557E-02
GWP-biogenic (as reported in the LCA)	1.232E-01	5.147E-05	3.736E-03	4.322E-04	3.087E-01	/	5.895E-06	9.527E-02

Indicator	A1	A2	A3	A4	A5	B6	C1	C2	C3	C4
GWP-total [kg CO ₂ eq.]	2.178E+01	4.810E-02	2.188E-02	4.306E-01	3.240E-01	1.547E+02	/	6.528E-03	1.475E-01	6.773E-01
GWP-fossil [kg CO ₂ eq.]	2.162E+01	4.802E-02	1.813E-02	4.299E-01	1.530E-01	1.492E+02	/	6.519E-03	5.206E-02	3.199E-02
GWP-biogenic [kg CO ₂ eq.]	1.232E-01	5.147E-05	3.736E-03	4.322E-04	3.087E-01	5.071E+00	/	5.895E-06	9.527E-02	6.453E-01
GWP-luluc [kg CO ₂ eq.]	4.147E-02	2.909E-05	7.080E-06	3.036E-04	1.346E-07	3.728E-01	/	3.165E-06	1.424E-04	2.815E-07
OOP [kg CFC-11 eq.]	2.281E-07	8.656E-10	3.188E-11	7.789E-09	1.905E-11	2.840E-06	/	1.418E-10	7.338E-10	3.983E-11
AP [mole of H ⁺ eq.]	1.388E-01	2.082E-04	9.511E-05	7.096E-03	2.014E-05	8.547E-01	/	2.126E-05	3.174E-04	4.211E-05
EP-freshwater [kg P eq.]	2.035E-03	5.805E-07	4.218E-07	3.728E-06	3.402E-06	1.476E-02	/	5.215E-08	1.318E-06	7.113E-06
EP-marine [kg N eq.]	2.439E-02	6.766E-05	2.113E-05	1.860E-03	1.272E-04	1.073E-01	/	7.224E-06	9.647E-05	2.659E-04
EP-terrestrial [mole of N eq.]	2.677E-01	7.365E-04	2.156E-04	2.050E-02	5.670E-05	1.251E+00	/	7.720E-05	1.055E-03	1.185E-04
POCP [kg NMVOC eq.]	7.990E-02	2.853E-04	5.828E-03	5.876E-05	1.193E-04	4.018E-01	/	3.175E-05	3.347E-04	2.494E-04
ADF-mineral & metals [kg Sb eq.]	1.884E-03	3.084E-07	1.145E-08	8.997E-07	4.183E-10	1.782E-03	/	2.093E-08	1.116E-07	8.745E-10
ADF-fossils [MJ]	2.693E+02	6.672E-01	1.745E-01	5.710E+00	1.565E-02	3.377E+03	/	9.242E-02	7.287E-01	3.271E-02
Water use [m ³ world equiv.]	3.852E+00	3.194E-03	1.978E-03	2.113E-02	3.374E-05	3.811E+01	/	3.766E-04	1.015E-02	7.054E-05

The results per FU of module D are shown below.

Indicator	D
GWP-total [kg CO ₂ eq.]	-1.567E+00
GWP-fossil [kg CO ₂ eq.]	-1.563E+00
GWP-biogenic [kg CO ₂ eq.]	-4.216E-03
GWP-luluc [kg CO ₂ eq.]	8.663E-05
OOP [kg CFC-11 eq.]	-1.252E-08
AP [mole of H ⁺ eq.]	-9.727E-03
EP-freshwater [kg P eq.]	-2.291E-05
EP-marine [kg N eq.]	-8.904E-04
EP-terrestrial [mole of N eq.]	-1.335E-02
POCP [kg NMVOC eq.]	-3.917E-03
ADF-mineral & metals [kg Sb eq.]	-1.309E-06
ADF-fossils [MJ]	-1.683E+01
Water use [m ³ world equiv.]	-4.668E+00

The emission factors in this study come from SIMAPRO 9.5.0.2 software embedded with the Ecoinvent database version 3.9.1.

Process	Time period (year)	Energy values (kg CO ₂ eq /kWh)
Electricity, medium voltage {CN} market group for electricity, medium voltage Cut-off, U	2022	9.480E-01
Electricity, low voltage {Europe without Switzerland} market group for electricity, low voltage Cut-off, U	2022	3.726E-01


The sensitivity analysis is based on operational electricity consumption with a 15% bias.

Bericht-Nr.: GC51161268-02.EN04
Report no.:

Seite 25 von 31
Page 25 of 31

Process		Minus 15%	100%	Plus 15%
GWP-total [kg CO2 eq.]	Electricity	1.513E+02	1.780E+02	2.047E+02
	Total	1.913E+02	2.180E+02	2.447E+02
	Contribution	79.064%	81.627%	83.631%
ADF-mineral & metals [kg Sb eq.]	Electricity	1.743E-03	2.050E-03	2.358E-03
	Total	4.115E-03	4.423E-03	4.731E-03
	Contribution	42.349%	46.358%	49.846%
ADF-fossils [MJ]	Electricity	3.303E+03	3.886E+03	4.469E+03
	Total	3.771E+03	4.354E+03	4.937E+03
	Contribution	87.578%	89.241%	90.511%

2. BLUP-100-200-ABS:

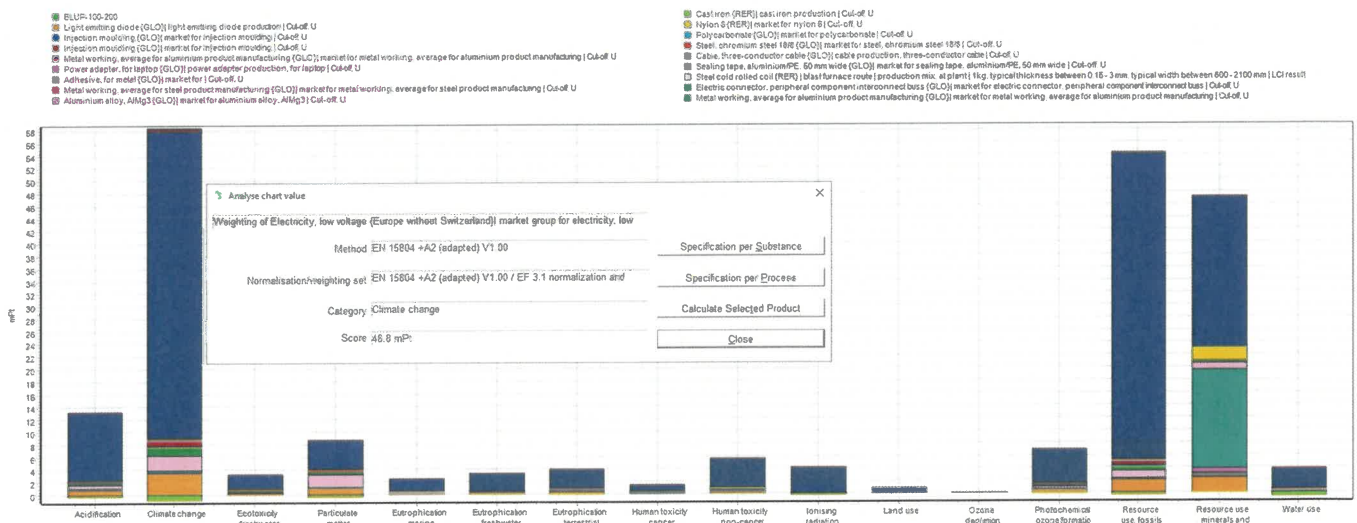

For BLUP-100-200-ABS lightbox, GWP-total, ADF-fossils and ADF-mineral & metals are key environmental impact indicators. Electricity in use stage is the most significant process for GWP-total, ADF-fossils and ADF-mineral & metals.

Therefore, a sensitivity analysis of the use of electricity is carried out to understand their impact on the three indicators.


The sensitivity analysis is based on operational electricity consumption with a 15% bias.

Bericht-Nr.: GC51161268-02.EN04
Report no.:

Seite 26 von 31
Page 26 of 31

Process		Minus 15%	100%	Plus 15%
GWP-total [kg CO2 eq.]	Electricity	1.403E+02	1.650E+02	1.898E+02
	Total	1.730E+02	1.978E+02	2.225E+02
	Contribution	81.074%	83.443%	85.285%
ADF-mineral & metals [kg Sb eq.]	Electricity	1.616E-03	1.901E-03	2.186E-03
	Total	3.461E-03	3.746E-03	4.032E-03
	Contribution	46.688%	50.746%	54.230%
ADF-fossils [MJ]	Electricity	3.062E+03	3.603E+03	4.143E+03
	Total	3.446E+03	3.986E+03	4.527E+03
	Contribution	88.866%	90.375%	91.524%

3. BLUP-200-200-ABS:

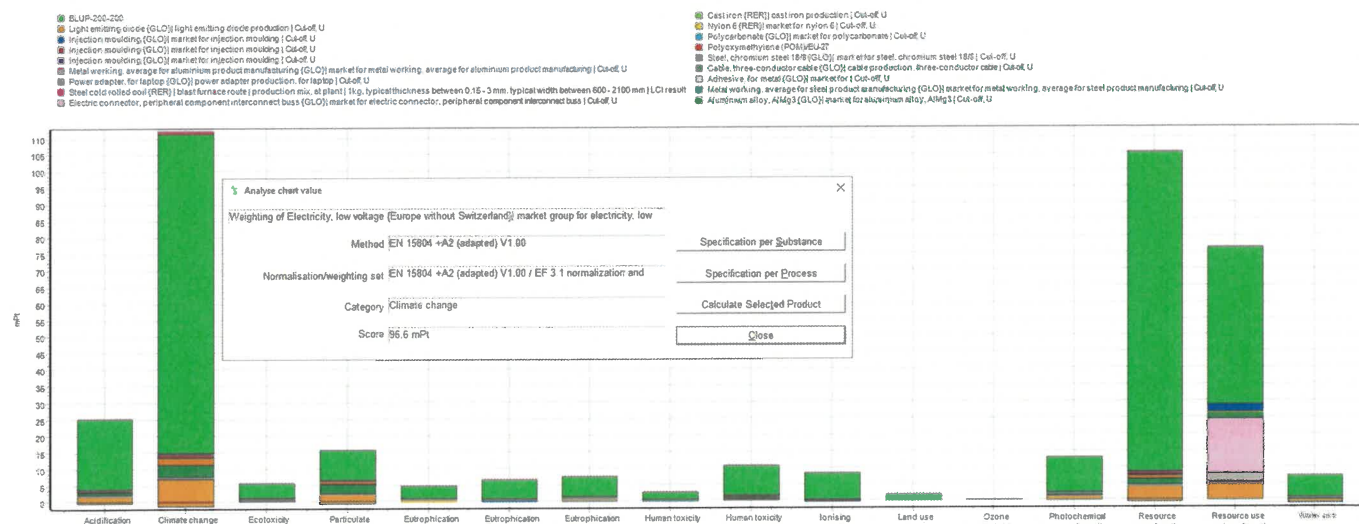

For BLUP-200-200-ABS lightbox, GWP-total, ADF-fossils and ADF-mineral & metals are key environmental impact indicators. Electricity in use stage is the most significant process for GWP-total, ADF-fossils and ADF-mineral & metals.

Therefore, a sensitivity analysis of the use of electricity is carried out to understand their impact on the three indicators.

The sensitivity analysis is based on the operational electricity consumption with a 15% bias.

Process		Minus 15%	100%	Plus 15%
GWP-total [kg CO2 eq.]	Electricity	1.366E+02	1.607E+02	1.848E+02
	Total	1.629E+02	1.870E+02	2.111E+02
	Contribution	83.817%	85.902%	87.511%
ADF-mineral & metals [kg Sb eq.]	Electricity	1.573E-03	1.851E-03	2.129E-03
	Total	2.705E-03	2.983E-03	3.261E-03
	Contribution	58.159%	62.054%	65.285%
ADF-fossils [MJ]	Electricity	2.982E+03	3.508E+03	4.034E+03
	Total	3.289E+03	3.816E+03	4.342E+03
	Contribution	90.641%	91.931%	92.909%

[illegible]

The sensitivity analysis is based on the operational electricity consumption with a 15% bias.

Bericht-Nr.: GC51161268-02.EN04
Report no.:

Seite 28 von 31
Page 28 of 31

Process		Minus 15%	100%	Plus 15%
GWP-total [kg CO2 eq.]	Electricity	1.315E+02	1.547E+02	1.779E+02
	Total	1.549E+02	1.781E+02	2.013E+02
	Contribution	84.867%	86.838%	88.355%
ADF-mineral & metals [kg Sb eq.]	Electricity	1.515E-03	1.782E-03	2.050E-03
	Total	3.400E-03	3.667E-03	3.935E-03
	Contribution	44.555%	48.597%	52.089%
ADF-fossils [MJ]	Electricity	2.871E+03	3.377E+03	3.884E+03
	Total	3.147E+03	3.654E+03	4.160E+03
	Contribution	91.223%	92.440%	93.361%

According to the results of the sensitivity analysis, the uncertainty of this series of lightboxes is ±13.866%.

4 Interpretation

- The report boundary of the portable lightbox promotional stand is set from cradle to grave. The product life cycle stage is from resource extraction to final disposal.
- The FU is defined as a lightbox providing lighting that delivers an outgoing artificial luminous flux of 1,000 lumens during a RSL of 50,000 hours. The lightbox is characterized for an outgoing artificial luminous flux of [V] lumens with a RSL of [H]. The FU is calculated as:

$$([V]/1,000) \times ([H]/50,000)$$

- For BLUP-88-200-ABS, the mass of biogenic carbon containing materials in the packaging accounts for 24.586% of the total mass of the packaging.
- For BLUP-100-200-ABS, the mass of biogenic carbon containing materials in the packaging accounts for 24.586% of the total mass of the packaging.
- For BLUP-200-200-ABS, the mass of biogenic carbon containing materials in the packaging accounts for 23.522% of the total mass of the packaging.
- For BLUP-600-200-ABS, the mass of biogenic carbon containing materials in the packaging accounts for 23.318% of the total mass of the packaging.
- After balancing the mass of biogenic carbon, the LCIA results per functional unit of lightbox in different specifications are reported.
- Identification of the significant issue is based on the result to find the most relevant process by analyzing the impact of the life cycle. GWP-total, ADF-fossils and ADF-mineral & metals are key environmental impact indicators. The sensitivity analysis is based on the use of operational electricity consumption with a 15% bias.

BLUP-88-200-ABS:

The unit process with the most significant contribution to GWP-total is electricity in use stage with a contribution of 79.064% to 83.631%. The unit process with the most significant contribution to ADF-fossils is electricity in use stage with a contribution of 87.578% to 90.511%. The unit process with the most significant contribution to ADF-mineral & metals is electricity in use stage with a contribution of 42.349% to 49.846%.

BLUP-100-200-ABS:

The unit process with the most significant contribution to GWP-total is electricity in use stage with a contribution of 81.074% to 85.285%. The unit process with the most significant contribution to ADF-fossils is electricity in use stage with a contribution of 88.866% to 91.524%. The unit process with the most significant contribution to ADF-mineral & metals is electricity in use stage with a contribution of 46.688% to 54.230%.

For BLUP-200-200-ABS:

The unit process with the most significant contribution to GWP-total is electricity in use stage with a contribution of 83.817% to 87.511%. The unit process with the most significant contribution to ADF-fossils is electricity in use stage with a contribution of 90.641% to 92.909%. The unit process with the most significant contribution to ADF-mineral & metals is electricity in use stage with a contribution of 58.159% to 65.285%.

BLUP-600-200-ABS:

The unit process with the most significant contribution to GWP-total is electricity in use stage with a contribution 84.867% to 88.355%. The unit process with the most significant contribution to ADF-fossils is electricity in use stage with a contribution of 91.223% to 93.361%. The unit process with the most significant contribution to ADF-mineral & metals is electricity in use stage with a contribution of 44.555% to 52.089%.

Value-choices:

The uncertainty of this series of light boxes is $\pm 13.866\%$. This report discloses the LCIA results derived from representative data, as shown in Section 3.

4.1 Assumptions and Limited Conditions

Module A:

- Information and data about the products are provided by EXPO D&P LTD. The data was not validated by a third party. Background data is based on the embedded database of the Ecoinvent database version 3.9.1.
- In module A3, the electricity used in manufacturing is sourced from the Chinese mixed grid. The electricity factor is selected based on the mixed electricity grid emission factor in China. All solid wastes generated during the production process are disposed of in accordance with landfill. The validation of this data was not included in this study.
- In module A5, the manufacturer claims that the lightbox is manually installed, without any energy consumption. Landfilling was chosen as the method for packaging disposal in this study. There is no valid evidence to prove that the packaging has been recycled. It is recommended that the downstream supply chain conduct relevant data collection.

Module B:

- The geographical boundary for product installation is the European Union. The electricity used in operation is sourced from the EU mixed grid. The electricity factor is selected based on the mixed electricity grid emission factor in Europe.

Module C:

Bericht-Nr.: GC51161268-02.EN04
Report no.:

Seite 30 von 31
Page 30 of 31

- In module C1, the manufacturer claims that the lightbox is manually dismantled, without any energy consumption.
- The manufacturer does not provide data on modules C2, C3 and C4 of the product to support the evaluation of the EoL, it was estimated based on the input materials and generic data.

Module D:

- Metals, PC, and LED are recycled according to the *collection rate* and *recycling rate* from the Eurostats. All other waste is disposed of through landfilling. The manufacturer does not provide evidence for the recycling of product to support the evaluation of module D.

The estimated impact results are only relative statements which do not indicate the end points of the impact categories, exceeding threshold values, safety margins or risks.

4.2 Additional information

- ☒ Luminous flux test report
- ☒ Type approved certificates

Bericht-Nr.: GC51161268-02.EN04
Report no.:

Seite 31 von 31
Page 31 of 31

Attached documents

Annex 1 Data collection tables- BLUP

Annex 2 Assessments of data quality – BLUP

Annex 3 Information on biogenic carbon content of per accessory- BLUP

Annex 4 LCIA results per declared unit of accessory- BLUP

- END OF STUDY REPORT –